



Glos PRF

I. Description

The pressure relieve flaps are designed with the purpose intensively to release over pressure due to extinguishing gases in close spaces to protect the building construction and interior from being over stressed. The flaps are opened under over pressure automatically.

1.1. Integrity in

- All types of facades and constructions

1.2. Function

- Controlled ventilation in case of internal pressure


1.3. Correspondence

Glos PRF is produced under control of Factory Quality Control System ISO 9001.

II. Components

2.1. Components

Glos PRF is a façade solution for automatic over pressure release designed on the basis of aluminum profiles and different types of fillings. The automatic opening is assured by gas springs. After decreasing of internal over pressure the gas spring close the wing automatically.

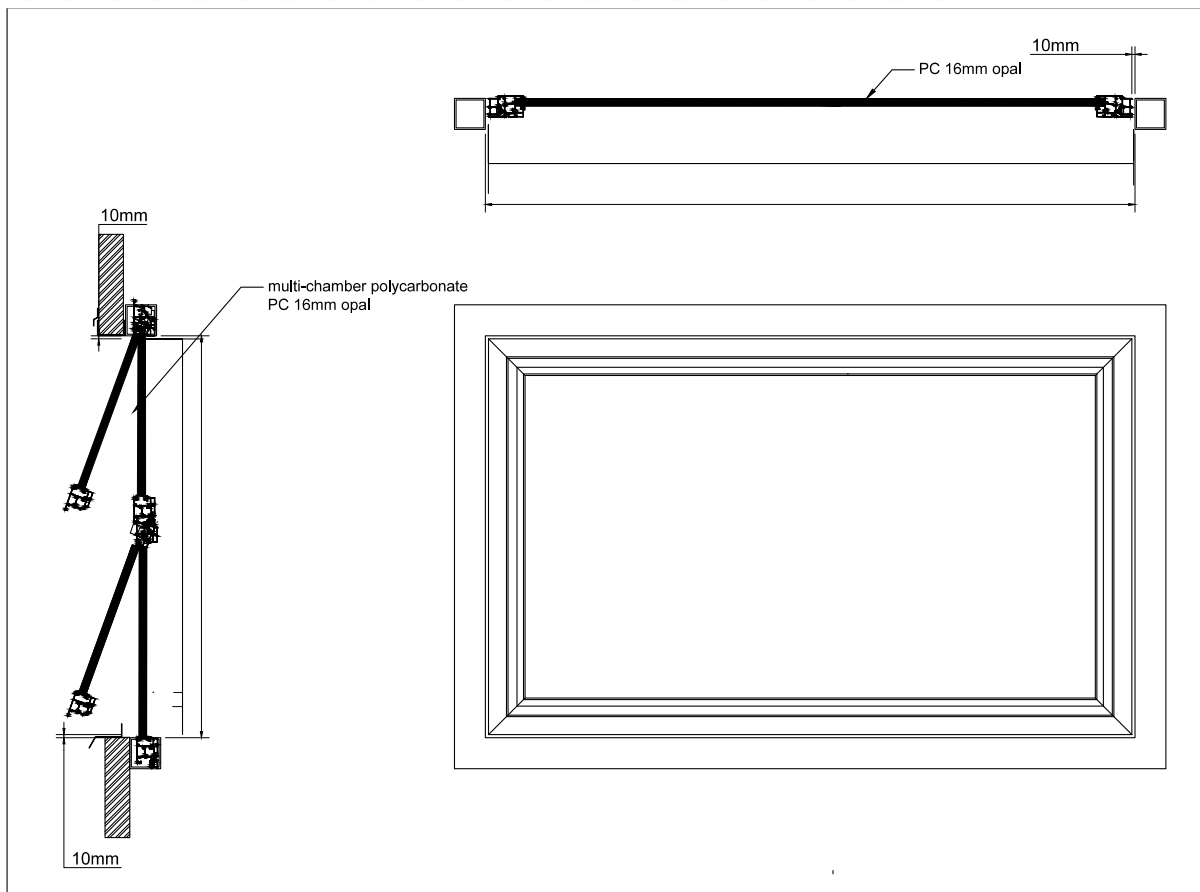

2.2. Technical specification

Maximum size - **2m²**

Free event area – **1 m²**

Opening pressure – **25 Pa**

2.3. Additional equipment

Anti-burglar grid

Anti-Insect set

Note: For more information, please contact your local consultant.